


Road Opening Regulations

1. Applicants performing work within the traveled portion of the Town roads will file a License/Permit Bond in the amount of \$3,000.00 that will remain in effect for two years, (the contractor is responsible for trench repair for 2 years from date of completed work) and a Certificate of Insurance for Bodily Injury and Property Damage Liability in the amount of \$300,000/\$500,000 and name the Town of Putnam Connecticut as ADDITIONAL INSURED.
2. Traffic warning signs WILL BE PLACED to warn traffic of the work area. NO STREET OR ROAD WILL BE CLOSED TO TRAFFICE FLOW.
3. All boulders, soft clay, organic or spongy materials and any other objectionable material will be removed and replaced with approved materials.
4. Surface course shall be six (6) inches in depth of process gravel, no stones larger than two (2) inches. The material will be shaped, wetted and compacted in twelve (12) inch layers with a power roller, equivalent vibratory roller or compactor until thoroughly compacted.
5. Pavement replacement will consist of bituminous concrete in two (2) layers (a binder coat compacted to one and one half (1 ½) inches and a finish coat compacted to one and one half (1 1/2) inch. All TRENCH EDGES WILL BE SQUARE CUT. Trenches will be paved within Seventy-two (72) hours of completed excavating. Traffic warning signs will remain in place until the Trench is paved and approved.
6. No grade changes will be made to ground surfaces at edge of existing pavements.
7. Surface drainage caused by construction in any road, driveway or landscaping will not be allowed to drain onto the surface of the existing road.
8. All stages of work will be inspected and approved the Director of Public Works or his Authorized representative.

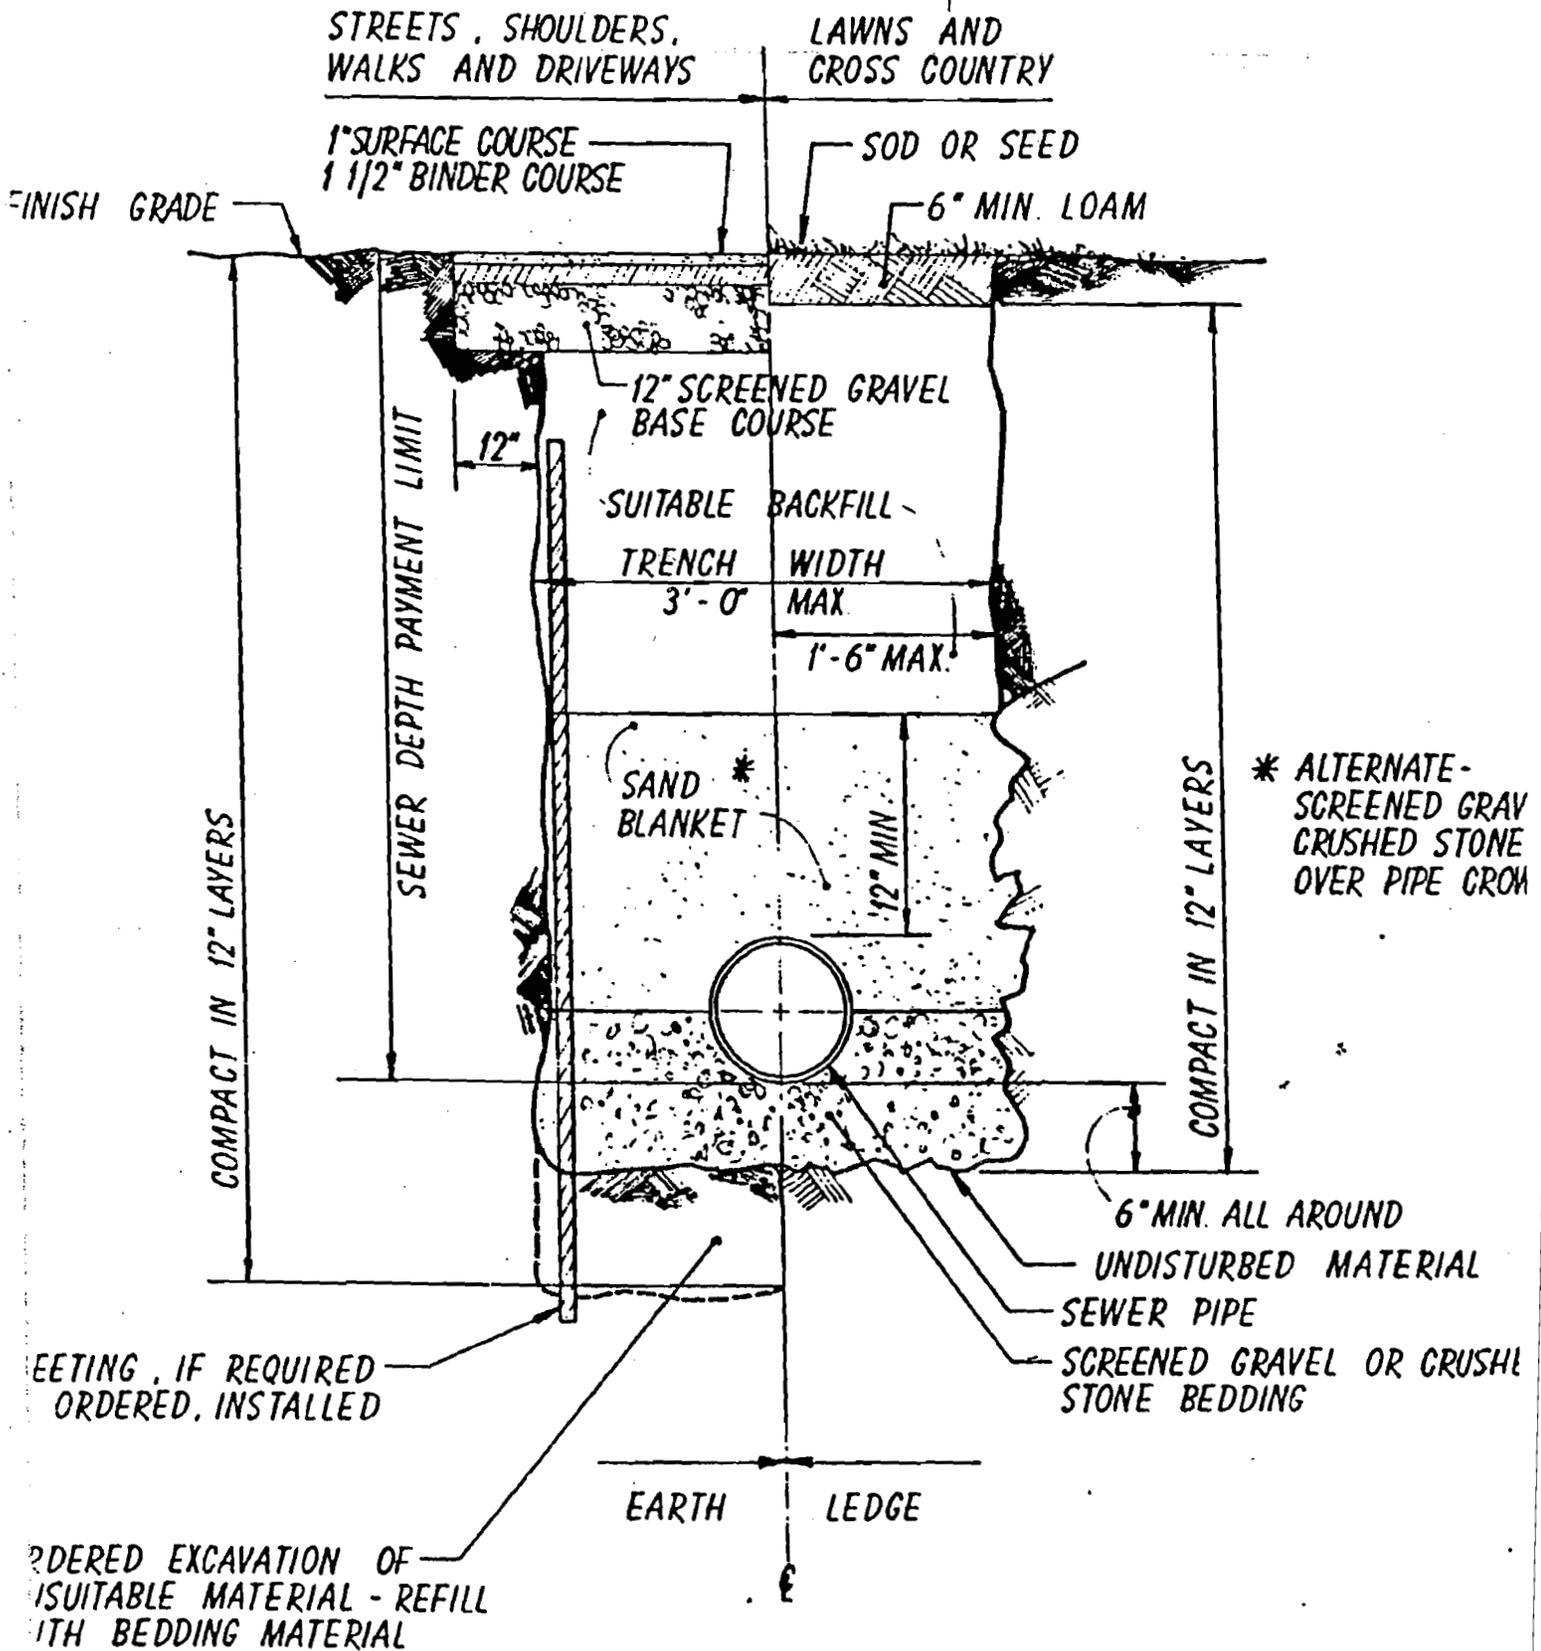

TRENCH SECTION

NO SCALE